

Instructions for using Back Tag Cement

5 oz. Tube



(1) 5 oz. tube.




(2) Unscrew cap and have tags handy.



(3) Using the reverse side of the cap, puncture the foil seal in tip of tube.



(4) Apply a bead across the middle of the back of the tag (approx. 1/4" diameter).

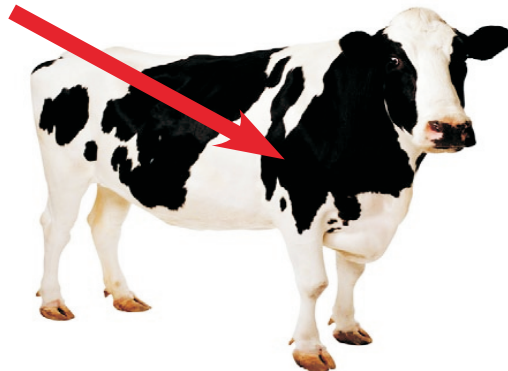

(5) Place on animal 6"-12" down from the back, just behind the front shoulder.